
MANOMAY









For better clarity and detailed surveillance



Two Way Audio Intercom

Built-in speaker and microphone with echo cancellation







Array LEDs for Clear Night Vision



Alexa Support

Watch Camera Footage on your Alexa Show Device







Customized Audio Alarm

Human detection based recording and push notifications



Human Detection & Human Tracking

Al Based humanoid detection with human tracking








7 Watt Solar Panel Built-in 15600mAh Rechargable Battery



Smart Notifications

Push notifications on mobile app with snapshots

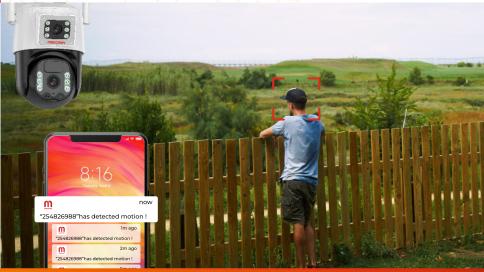





H.265 Video Compression

High quality video compression for optimum utilization of storage space



Manomay App

30 Days Cloud Recording

FREE



Configure your Camera in just 3 Quick Steps



DownloadManomay App from
App Store or Playstore



In app, **Tap "+"** sign & scan QR code from back of the camera



Follow set-up instructions and your camera is ready to use

3+3MP 4G Protect Green Link Solar Linkage Mini Pan-Tilt Camera



3D DNR

PIR Detection

Monitoring

Features

- 3+3MP 4G Protect Green Solar Link Mini PT Camera
- 4MM+4MM Fixed Lens
- PT Horizontal & Vertical Movement Range Pan 270°, Tilt 90°
- Dual monitoring. One camera for monitoring, One camera for PT detailed monitoring.
- Built-in high-sensitivity Mic and Speaker For Full Duplex Audio Intercom
- Support 10x Digital Zoom
- Can be set 6 preset points favorite locations
- Built-in PIR Sensor
- Built-in Battery 15600 mAh rechargeable lithium battery with 7 Watt Solar Panel
- Night Vision and Full Colour Modes
- Micro SD Card Up to 256GB & Cloud Storage (Optional)
- 4G Connection, QR code camera configuration with mobile/PC
- Active defense and siren light
- Custom Voice Recordable message for Audio Alerts Broadcast
- Area motion detection, Humanoid detection, Push Realtime Notification on the
- Support monitoring: Pc / Mobile on Manomay
- Compression : H.264/H.265
- Alexa Support



Technical Specification	
Product Code	M1009-A
Image Sensor	1 / 2.8" 3MP+3MP HD CMOS Dual Sensor
Resolutions	2304 X 2592
Lens	Bullet: 4mm fixed lens & PT Dome: 4mm fixed lens
IR LED	Bullet: 2 Pcs, Pan-Tilt Dome: 2 Pcs
IR Distance	20 Meters
White LED	Bullet: 4 Pcs, Pan-Tilt Dome: 4 Pcs
White LED Distance	20 Meters
Video Compression Standard	H.264/H.265
Video Streaming	Main Stream : 2304 x 2592@15fps
	Sub Stream: 800 x 896@15fps
Audio Input / Output	Two way audio, Built in microphone and speakers
Audio Compression Standard	G711A
Pan-Tilt Angle	Pan: 0° - 270°, Tilt: 0° - 90° Horizontal speed 20%S, Vertical Speed 10%S
Day & Night	IR/ Full Colour
Min Illumination	Colour: 0.1 Lux, BW: 0.01 Lux
White Balance	Auto
Mirror / Flip	On / Off
Electronic Shutter	Auto
On Screen Display (OSD)	Date, Time, & Title
AI Features	Motion Detection, Human Tracking
S / N Ratio	> 39.1 dB

Android, iOS, Windows (Manomay) Slots Nano SIM Card Slot & Micro SD Card Slot Storage Support Micro SD Card up-to 256GB & Cloud Storage (Optional)

Auto

8-10 Meter 120°

Button	Reset Button
Protocol	N1 Protocol
Connection Mode	4G SIM Network
Battery	Built-in 15600mAh Rechargeable battery
4G Frequency Band	FDD - LTE: B1/B3/B5/B8; TDD - LTE: B34/B38/B39/B40/B41
Light Mode	LED Flash; 4G Network not Connected
	LED Continue ON; 4G Network Connected
Power Input	DC Input 5V – 2A [C-Type Connector]
Power Consumption	≤ 5W
Thunder Prevention	Standard IEC61000-4-5
Working Temperature / Humidity	$\text{-}10^{\circ}\text{C}$ to $50^{\circ}\text{C}/30\%$ to $80\%\text{RH}$
Storage Temperature / Humidity	-20° C to 60° C / 20% to 90% RH
Housing Type	Plastic (IP66)
Dimension	185 X 130 X 310mm (L×W×H)
Net Weight	0.842Kg
Gross Weight	1.45Kg

^{*}Note: Product Specifications are subject to change without prior notice.

- Applications -



REMOTE LOCATIONS



PROJECT SITES



HOMES



CONSTRUCTION SITES



SHOPS



FARMS